

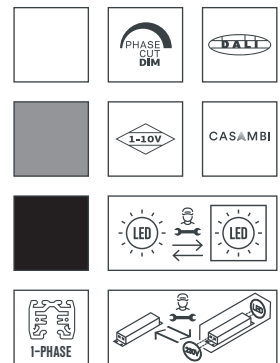


# SURT.

This 3-phase track spot is a permanent fixture in flexible lighting plans. The step-less adjustable beam angle from 15° to 60° and the possibility of dimming within a range of 10-100% (with a potentiometer on the rear) gives you the freedom to choose the light level without any control system. Perfect for use at trade fairs, exhibitions or in your shop windows.

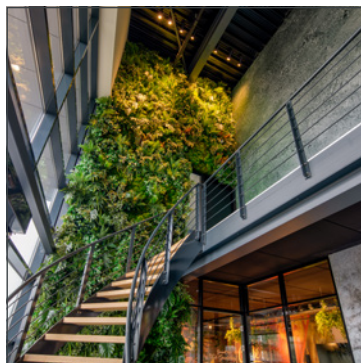

TRACK LUMINAIRES

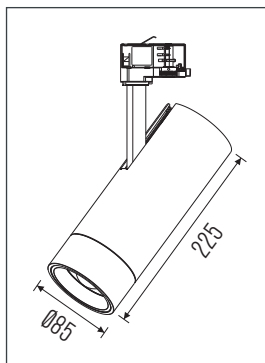

Adjustability : 355° rotational and 90° tiltable  
 CCT : 3000K  
 CRI : (RA) >90  
 Chromaticity tolerance : 3  
 Luminous flux : max. 2150Lm  
 Connected load : 29W  
 System efficiency : max. 74Lm/W  
 Electrical Safety Class : Class I

Optic : Zoom Lens 15°-60°  
 Mains voltage : 220-240V / 50-60Hz  
 Max. ambient temperature : 35°C  
 Ingress protection : IP20  
 Net. weight : 1.10Kg  
 Warranty : 5 years  
 Details : Direct Potentiometer Dimming

Go to full specs

