


BALDR.




BALDR S.

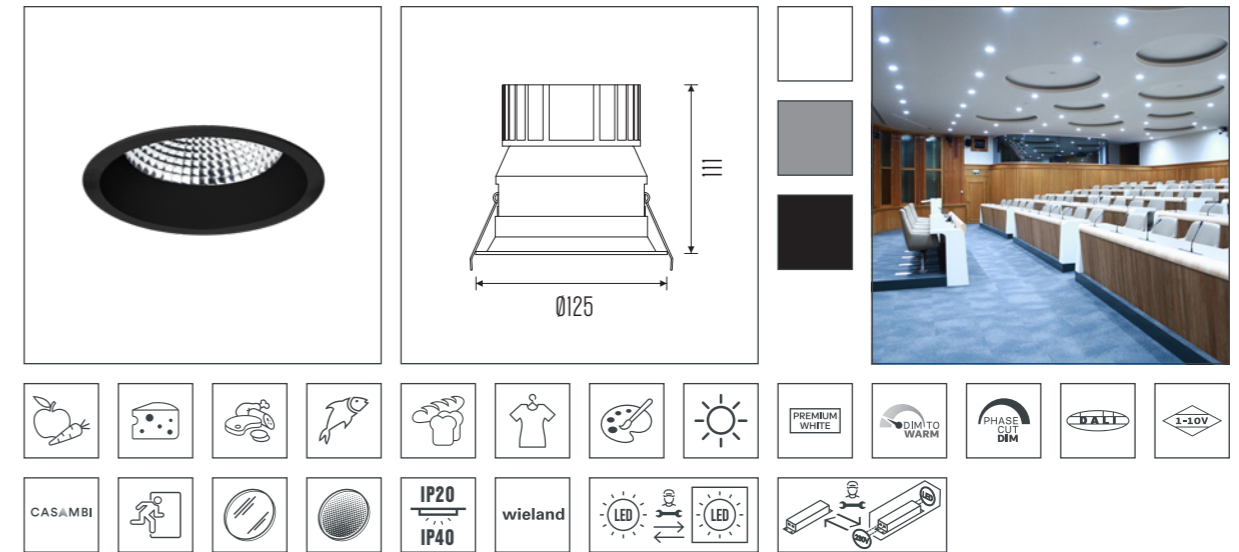

Cut-out	: Ø115mm	Optic	: Facet anodized aluminum reflector 50°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP40 from optical side
Luminous flux	: max. 2500Lm	Net. weight	: 0.50Kg
Connected load	: max. 18.5W	Warranty	: 5 years
System efficiency	: max. 127Lm/W		
Electrical Safety Class	: Class II		


[Go to full specs](#)



MULTIFUNCTIONAL ALL-ROUNDER.

This recessed downlight is used for multifunctional lighting. Perfect for workspaces en spaces where meetings and presentations are held. With the various options, such as dim-to-warm and tunable white you can smoothly change the colour temperature and therefore the atmosphere of the entire room.

BALDR L.

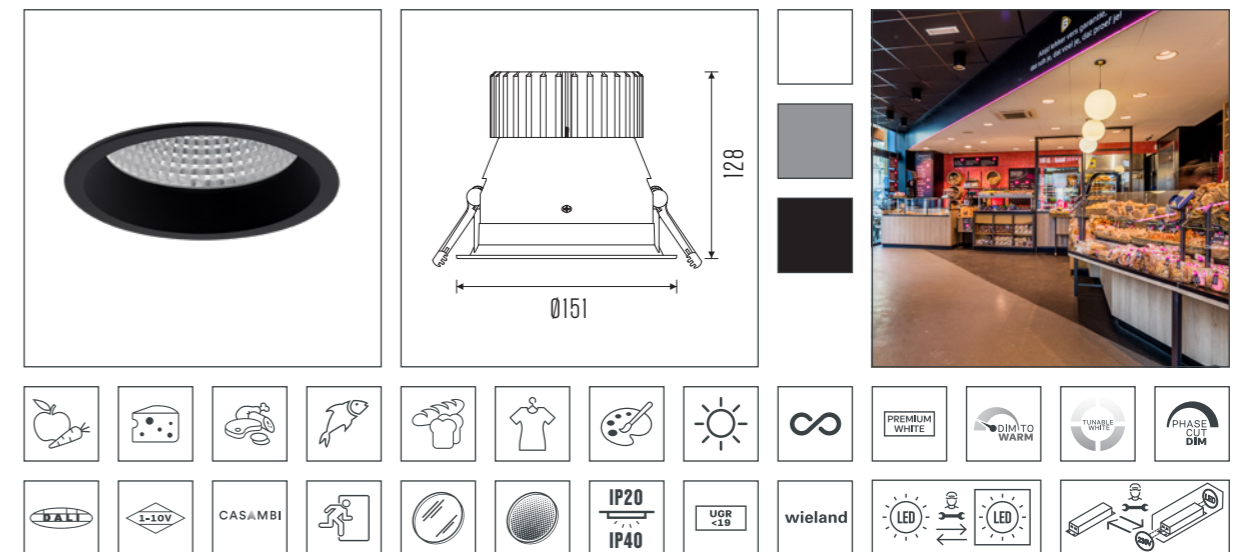

Cut-out	: Ø140mm	Optic	: Facet anodized aluminum reflector 45°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP40 from optical side
Luminous flux	: max. 4500Lm	Net. weight	: 0.86Kg
Connected load	: max. 38.5W	Warranty	: 5 years
System efficiency	: max. 132Lm/W		
Electrical Safety Class	: Class II		

[Go to full specs](#)

